
FILLING PUMPS

FILLING PUSH CART

with a powerful pump designed for professional filling and air venting of sealed systems like solar thermal systems, floor and wall heating circuits.

Code - 9561

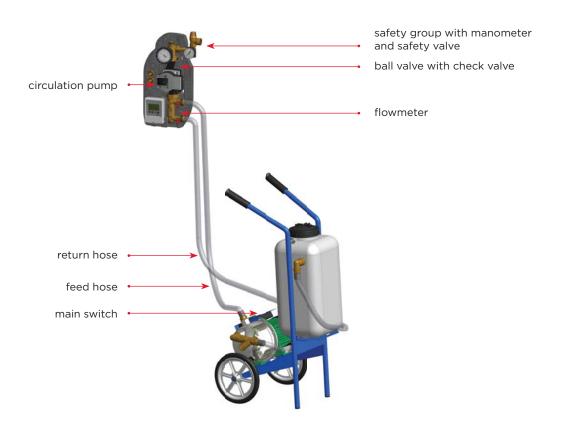

ADVANTAGES OF THE FILLING CART

- powerful pump 1.1 kW power input, 60 l/ min. max. flow rate, 5 bar max. working pressure, pump housing in stainless steel
- splashproof switch
- maintenance-free pump with a start capacitor and protection against heat overload
- transparent pressure hoses for visual check
- ball valves at the hose ends for clean and safe connections
- filter to remove impurities from the system

TECHNICAL DATA

Electric motor	230 V / 1.1 kW
IP rating	IP44
Max. head	50 m
Max. flow rate	60 l/min
Max. pressure	5 bar
Max. suction height	9 m
Max. fluid temperature	35 °C
Power cable length	1.5 m
Empty weight	16 kg

regulus.eu FLUIDS, CHEMICALS