

DESCALING CIRCULATION PUMPS

PRESSURE DESCALING PUMPS

designed to remove sediments with the use of chemicals. Equipped with a 4-way valve, they facilitate cleaning solution flow reversal for the best cleaning results.




BOSS 22 FI

BOSS 36 FI

BOSS 5 FI

		BOSS 22 FI	BOSS 36 FI	BOSS 5 FI
TANK VOLUME	l	22	36	5
FLOW RATE	l/min	30	48	30
HEAD	m	10	15	7
CONNECTION	--	1/2"	3/4"	1/2"
VOLTAGE	--	250 VAC/50 Hz	250 VAC/50 Hz	250 VAC/50 Hz
PUMP TYPE	--	rotary, 165 W	rotary, 290 W	rotary, 165 W
MAX. WORKING TEMPERATURE	°C	60	60	60
IP RATING	--	IP55	IP55	IP55
DIMENSIONS (H x W x L)	mm	500 x 350 x 350	630 x 350 x 350	440 x 330 x 330
WEIGHT	kg	9.5	11	8
CODE	--	590	7786	5990

DESIGN OF BOSS PUMPS

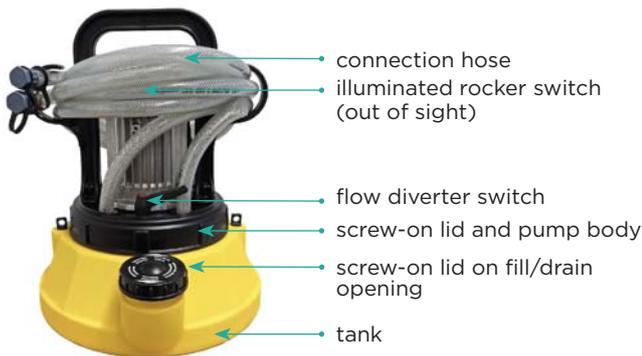

Note:

Use only chemical agents recommended by Regulus. Pipes, heat exchangers or systems to be cleaned must permit the solution to flow through.