

PROTECTION AGAINST BOILER CORROSION AND FOULING

Load Valves with automatic by-pass balancing




TSV3BM

Valves for return temperature control, with automatic by-pass balancing

Load valve with automatic by-pass balancing and 1" M threads permitting easy connection to copper pipes with union nuts, e.g. when integrated into a boiler.

DIMENSIONS



VERSIONS

	TSV3BM 45	TSV3BM 50	TSV3BM 55	TSV3BM 65
OPENING TEMPERATURE °C	45	50	55	65
CONNECTION SIZE --	G 1" M	G 1" M	G 1" M	G 1" M
K _{vs} from A to AB m ³ /h	9.8	9.8	9.8	9.8
K _{vs} from B to AB m ³ /h	5.3	5.3	5.3	5.3
WEIGHT kg	0.65	0.65	0.65	0.65
CODE --	13977	18855	13978	13979


50, 60, 70 °C temperatures upon request

TSV34BM

Valves for return temperature control, with automatic by-pass balancing

Load valve with automatic by-pass balancing and 3/4" F threads permitting easy connection using copper pipes with union nuts, e.g. for installation into a boiler.

DIMENSIONS

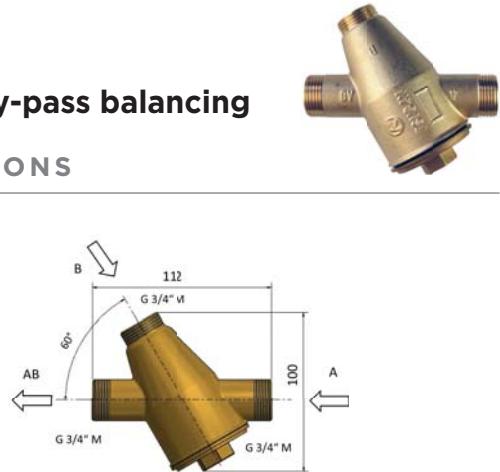

VERSIONS

	TSV34BM 45	TSV34BM 55	TSV34BM 65
OPENING TEMPERATURE °C	45	55	65
CONNECTION SIZE --	G 3/4" M	G 3/4" M	G 3/4" M
K _{vs} from A to AB m ³ /h	5.6	5.6	5.6
K _{vs} from B to AB m ³ /h	5.6	5.6	5.6
WEIGHT kg	0.6	0.6	0.6
CODE --	16928	16409	16929

Only on order!