


R0BC 200 Hot Water Storage Tank

	Main Features	
	Application	Hot Water Storage Tank with no inner heat exchangers is intended for DHW heating. Up to 2 heat sources can be connected via external heat exchangers. It comes fitted with detachable insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table. If desired, an electric heating element can be installed into the hot water tank.
	Working fluid	water
	Code	10586
Energy Efficiency Data (as per EC Regulation No. 812/2013)		
Energy efficiency class		C
Static loss		74 W
Storage volume		212 l
Technical data		
Total DHW tank volume		212 l
Max. working temperature in DHW tank		95 °C
Max. working pressure in DHW tank		10 bar
DHW tank diameter		500 mm
DHW tank diameter with insulation		600 mm
DHW tank overall height		1265 mm
Tipping height		1405 mm
DHW tank empty weight		52 kg
Materials		
DHW tank material		S235JR, inner surf. enamelled (DIN 4753-3)
DHW tank insulation		PU foam (hard)
DHW tank outer surface insulation		PVC
Accessories		
Electric heating element		models ETT-A, D2, M, N, R, S, F2, P, U
Heating element max. length for E1 / flange		500 mm / 500 mm
Electronic anode rod		code 9174
Flange for heating element incl. electronic anode		code 21635
Flange for tube heat exchanger incl. electronic anode		code 21637
Spare parts (magnesium anode rods)		
Mg anode rod (A1)		code 4025
Mg anode rod - chain type		code 13112

R0BC 200 Hot Water Storage Tank

Dimensions

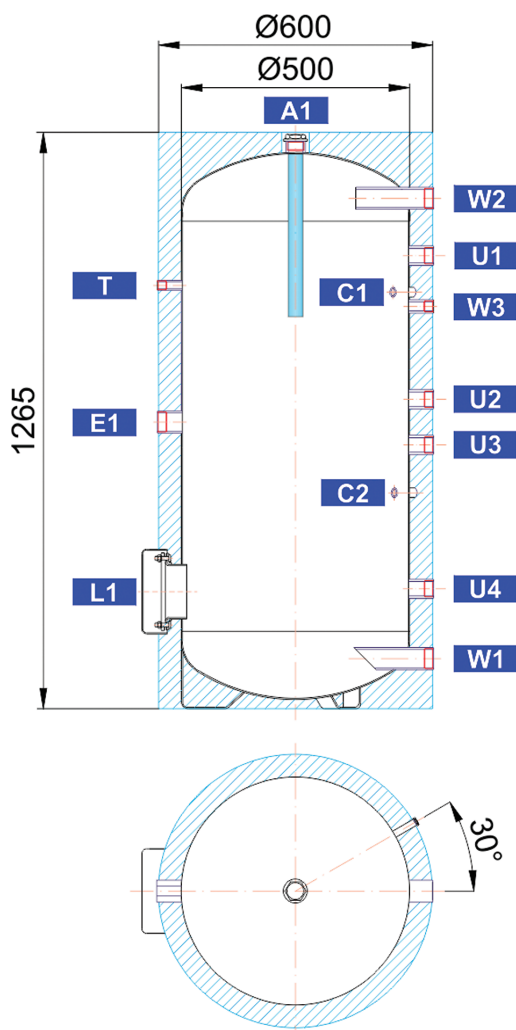

CONNECTIONS

pos.	description	connection	height [mm]
DHW heating			
W1	Cold water	G 6/4" F	110
W2	Domestic hot water	G 6/4" F	1120
W3	Recirculation	G 3/4" F	884
Auxiliary heat source			
E1	Electric heating element	G 6/4" F	629
Control and safety			
C1	Temperature sensor	G 1/2" F	914
C2	Temperature sensor	G 1/2" F	474
T	Thermometer	G 1/2" F	929
Universal inlet/outlet			
U1	Universal inlet/outlet	G 5/4" F	994
U2	Universal inlet/outlet	G 5/4" F	679
U3	Universal inlet/outlet	G 5/4" F	579
U4	Universal inlet/outlet	G 5/4" F	264
Others			
L1	Flange	8 x M10	257
A1	Magnesium anode rod	G 5/4" F	1229