


**R2DC 250 Hot Water Storage Tank**

	<b>Main Features</b>	
	<b>Application</b>	Hot water tank intended for DHW heating, with 2 integrated enamelled heat exchangers. It comes fitted with detachable insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table. If desired, an electric heating element can be installed into the hot water tank.
	<b>Working fluid</b>	water (tank) - water, water-glycol mixture (max. 1:1), water-glycerine mixture (max. 2:1) (heat exchanger)
	<b>Code</b>	12051

**Energy Efficiency Data (as per EC Regulation No. 812/2013)**

Energy efficiency class	C
Static loss	87 W
Storage volume	242 l

**Technical data**

Total DHW tank volume	260 l
Fluid volume in DHW tank	242 l
Upper heat exchanger volume	8.0 l
Lower heat exchanger volume	10.0 l
Upper heat exchanger surface area	1.0 m <sup>2</sup>
Lower heat exchanger surface area	1.5 m <sup>2</sup>
Max. working temperature in DHW tank	95 °C
Max. working temperature in heat exchangers	110 °C
Max. working pressure in DHW tank	10 bar
Max. working pressure in heat exchangers	10 bar
DHW tank diameter	500 mm
DHW tank diameter with insulation	584 mm
DHW tank overall height	1560 mm
Tipping height	1670 mm
DHW tank empty weight	120 kg

**Power for hot water heating from 10 °C to 45 °C at heating water temperature 60 °C**

Upper heat exchanger performance	16 kW, (400 l/h)
Lower heat exchanger performance	24 kW, (590 l/h)

**Materials**

DHW tank material	S235JR, inner surf. enamelled (DIN 4753-3)
Heat exchanger material	S235JR+N, outer surf. enamelled (DIN 4753-3)
DHW tank insulation	PU foam (hard)
DHW tank outer surface insulation	plastic

**Accessories**


Electric heating element	models ETT-A, D2, M, N, R, S, F2, P, U
Heating element max. length for E1	500 mm
Electronic anode rod	code 9174

R2DC 250 Hot Water Storage Tank

Spare parts (magnesium anode rods)

Mg anode rod (A1)	code 448
Mg anode rod with flange	code 15847

Dimensions

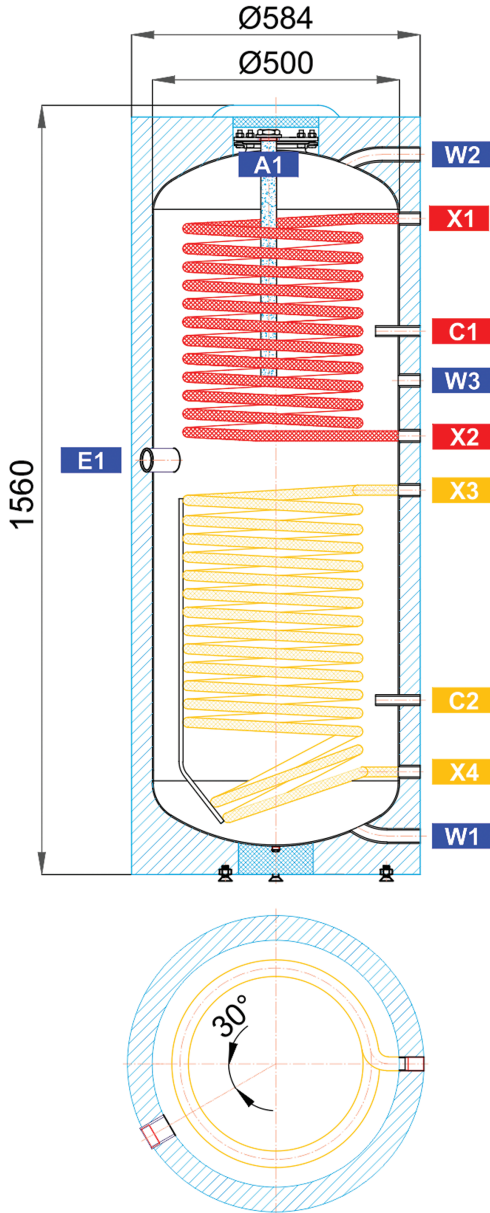

CONNECTIONS

pos.	description	connection	height [mm]
<b>DHW heating</b>			
W1	Cold water	G 3/4" M	74
W2	Domestic hot water	G 3/4" M	1454
W3	Recirculation	G 3/4" F	996
<b>Auxiliary heat source</b>			
E1	Electric heating element	G 6/4" F	835
<b>Control and safety</b>			
C1	Temperature sensor	G 1/2" F	1096
C2	Temperature sensor	G 1/2" F	349
<b>Heat sources</b>			
X1	Supply from heat source	G 3/4" M	1324
X2	Return to heat source	G 3/4" M	884
X3	Supply from heat source	G 3/4" M	774
X4	Return to heat source	G 3/4" M	204
<b>Others</b>			
A1	Magnesium anode rod	G 5/4" F	1492

C2 tapping is supplied incl. adapter G 1/2" M – M12x1.5 and cable gland. Earthing metal strip is run through the insulation next to the upper flange.

**R2DC 250 Hot Water Storage Tank**

Pressure drop diagram

