


RBC 300 HP Hot Water Storage Tank

	Main Features	
	Application	Hot water tank intended for DHW heating, with 1 upsized enamelled heat exchanger. It comes fitted with detachable insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table.
	Working fluid	water (tank) - water, water-glycol mixture (max. 1:1), water-glycerine mixture (max. 2:1) (heat exchanger)
	Code	10535

Energy Efficiency Data (as per EC Regulation No. 812/2013)

Energy efficiency class	C
Static loss	87 W
Storage volume	276 l

Technical data

Total DHW tank volume	299 l
Fluid volume in DHW tank	276 l
Heat exchanger volume	23.0 l
Heat exchanger surface area	3.8 m ²
Max. working temperature in DHW tank	95 °C
Max. working temperature in heat exchanger	110 °C
Max. working pressure in DHW tank	10 bar
Max. working pressure in heat exchanger	10 bar
DHW tank diameter	500 mm
DHW tank diameter with insulation	610 mm
DHW tank overall height	1710 mm
Tipping height	1820 mm
DHW tank empty weight	155 kg

Power for hot water heating from 10 °C to 45 °C at heating water temperature 60 °C

Heat exchanger performance	48 kW, (1190 l/h)
----------------------------	-------------------

Materials

DHW tank material	S235JR, inner surf. enamelled (DIN 4753-3)
Heat exchanger material	S235JR+N, outer surf. enamelled (DIN 4753-3)
DHW tank insulation	PU foam (hard)
DHW tank outer surface insulation	PVC

Accessories


Electric heating element	models ETT-A, D2, M, N, R, S, F2, P, U
Heating element max. length for E1 / flange	500 mm / 370 mm
Electronic anode rod	code 17375
Electronic anode rod for flange	code 17434

Spare parts (magnesium anode rods)

Mg anode rod (A3)	code 3698
-------------------	-----------

RBC 300 HP Hot Water Storage Tank

Dimensions

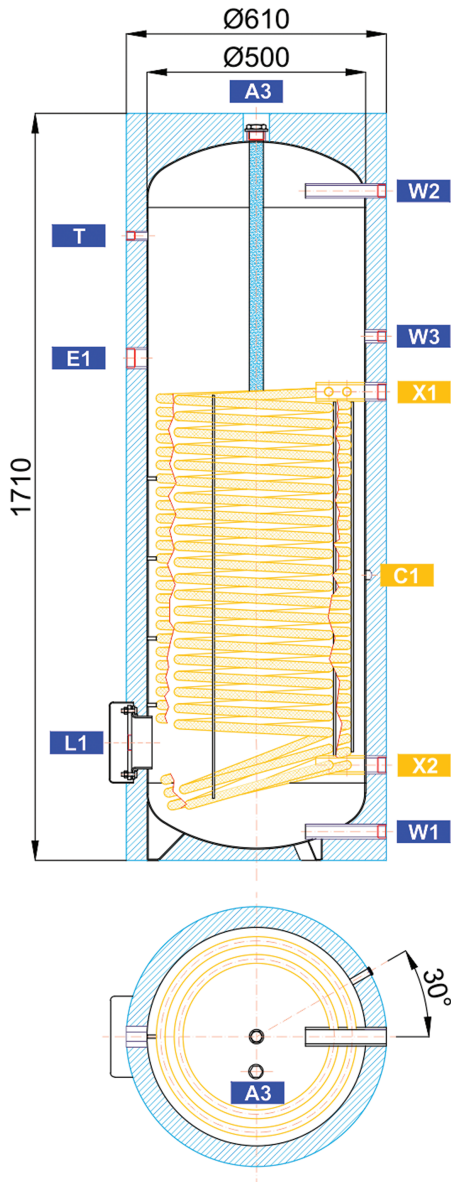

CONNECTIONS

pos.	description	connection	height [mm]
DHW heating			
W1	Cold water	G 1" F	67
W2	Hot water	G 1" F	1609
W3	Recirculation	G 3/4" F	1200
Auxiliary heat source			
E1	Electric heating element	G 6/4" F	1150
Control and safety			
C1	Temperature sensor	G 1/2" F	653
T	Thermometer	G 1/2" F	1430
Heat sources			
X1	Supply from heat source	G 5/4" F	1080
X2	Return to heat source	G 5/4" F	230
Others			
L1	Flange	8 x M10	270
A3	Magnesium anode rod	G 5/4" F	1675

RBC 300 HP Hot Water Storage Tank

Pressure drop diagram

