


RBC 3000 Hot Water Storage Tank

	Main Features	
	Application	Hot water tank intended for DHW heating, with integrated enamelled heat exchanger. It comes fitted with detachable insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table. If desired, an electric heating element can be installed into the hot water tank.
	Working fluid	water (tank) - water, water-glycol mixture (max. 1:1), water-glycerine mixture (max. 2:1) (heat exchanger)
	Code	8477

Energy Efficiency Data (as per EC Regulation No. 812/2013)

Energy efficiency class	N/A
Static loss	354 W
Storage volume	2809 l

Technical data

Total DHW tank volume	2841 l
Fluid volume in DHW tank	2809 l
Heat exchanger volume	32.0 l
Heat exchanger surface area	5.2 m ²
Max. working temperature in DHW tank	95 °C
Max. working temperature in heat exchanger	110 °C
Max. working pressure in DHW tank	10 bar
Max. working pressure in heat exchanger	10 bar
DHW tank diameter	1200 mm
DHW tank diameter with insulation	1400 mm
DHW tank overall height	2980 mm
Tipping height	3300 mm
DHW tank empty weight	642 kg

Power for hot water heating from 10 °C to 45 °C at heating water temperature 60 °C

Heat exchanger performance	83 kW, (2050 l/h)
----------------------------	-------------------

Materials

DHW tank material	S235JR, inner surf. enamelled (DIN 4753-3)
Heat exchanger material	S235JR+N, outer surf. enamelled (DIN 4753-3)
DHW tank insulation	PU foam (soft)
DHW tank outer surface insulation	PVC

Accessories


Electric heating element	models ETT-A, D2, M, N, R, S, F2, P, U
Heating element max. length for E1 / flange	815 mm / 815 mm
Electronic anode rod	code 17371
Electronic anode rod for flange	code 17436

RBC 3000 Hot Water Storage Tank

Spare parts (magnesium anode rods)

Mg anode rod (A1)	code 3698
Mg anode rod (A2)	code 464
Mg anode rod (A3)	code 464
Mg anode rod - chain type	code 13112

Dimensions

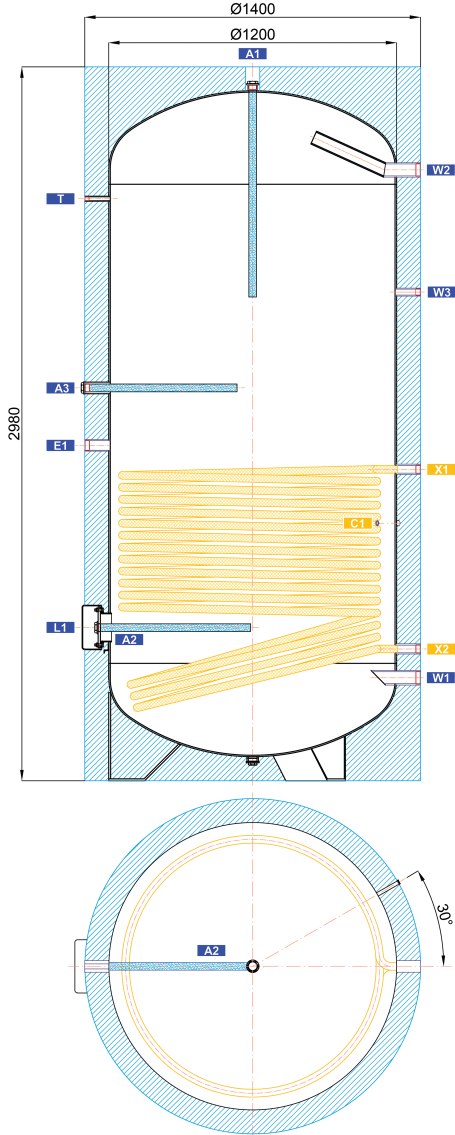

CONNECTIONS

pos.	description	connection	height [mm]
DHW heating			
W1	Cold water	G 2" F	430
W2	Hot water	G 2" F	2550
W3	Recirculation	G 1" F	2040
Auxiliary heat source			
E1	Electric heating element	G 6/4" F	1400
Control and safety			
C1	Temperature sensor	G 1/2" F	1075
T	Thermometer	G 1/2" F	2430
Heat sources			
X1	Supply from heat source	G 5/4" F	1300
X2	Return to heat source	G 5/4" F	550
Others			
L1	Flange	8 x M10	640
A1	Magnesium anode rod	G 5/4" F	2900
A2	Magnesium anode rod	G 5/4" F	640
A3	Magnesium anode rod	G 5/4" F	1640

RBC 3000 Hot Water Storage Tank

Pressure drop diagram

