



Pressure reducer, max. inlet pressure 15 bar



Main features	
Application	pressure reduction
Purpose	designed for incoming fluid pressure stabilization and reduction to a desired value
Working fluid	water, compressed air
Installation position	any position

660 for pressure reducer with 1/2" connection 661 for pressure reducer with 3/4" connection

Technical data	
Max. working pressure	15 bar
Fluid max. working temperat.	80 ℃
Outlet pressure	1 to 4 bar
Connection size	see Dimensions

Materials		
Valve body	nickel-plated brass	
Valve seat	brass	
O-rings	NBR	
Plastic parts	nylon	

Dimensions and weight


1/2" Pressure reducer


Weight: 365 g

Connection: 2 x G 1/2" F

3/4" Pressure reducer

Weight: 380 g
Connection: 2 x G 3/4" F



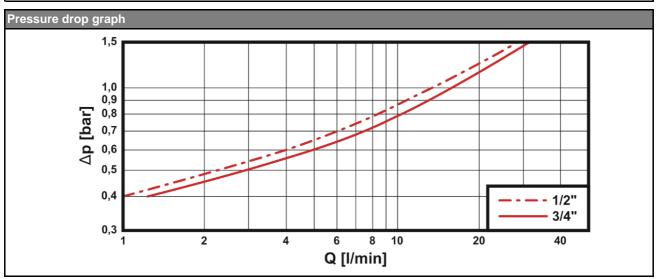

Tel.: +420 241 765 191 E-mail: sales@regulus.eu Fax: +420 241 763 976 Web: www.regulus.eu